




Classic 350

**Classic Bus 3.5" Filler Cap, Pull Lever Action + Aero 300
N-Lock with Ø51 Integral Neck .
Part Number: OM-ZA-009 (C3550A3S)**

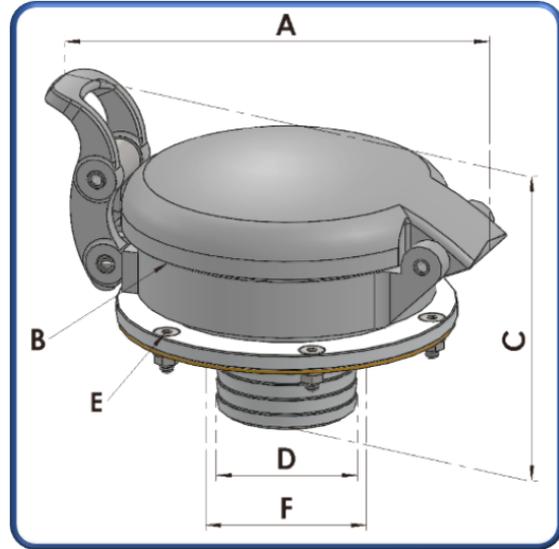

Options:

Part Description

Classic 350 Fuel Filler Cap, Aero 300 Locking, Ø51.0mm Integral Neck

Part Number

OM-ZA-010 (C3550A3L)

Specifications:

Options:

Fixing Arrangement:

Applications:

Compatibilities:

Finish:

Weight:

Materials:

Classic Cap:

Seal:

Centre Cap:

O-Ring:

Saddle:

Lever & Centre Pin:

Washer & Nyloc Nut:

Non-Locking or Locking (Supplied with Cap)

6 x M5 CSK Bolts

Fuel, Oil & Water Tanks

Operation Temperature -40°C to +80°C

Natural Polished

1200.0 grams

Aluminium Alloy (Casting)

Neoprene Bonded Cork NBR

Aluminium Alloy 6082/T6 (Forging)

Viton A (FPM or FKM)

Acetal POM Kepital F20-03

Stainless Steel 303/304

Stainless Steel A2 Type

Dimensions:

Overall Length A:

Overall Width B:

Overall Height C:

Height & Diameter D:

Fixing Arrangement E:

Cut-Out Aperture F:

Filling Aperture:

168mm

122mm

118.5mm

35mm x Ø51mm

6 x M5 CSK Bolts on a 114.3mm PCD

Ø62.0 MIN. / Ø63.0 MAX.

Ø46.0mm

Optional ('s):

Lead Free Flap

Fluid Containment – When It Matters

Tell: +4420 8594 7990 / Fax: +4420 8594 7989 / www.newton-equipment.com / info@newton-equipment.com

Registered in England. 6 Orwell Close/ Fairview Ind. Park/ Rainham/ Essex/ RM13 8UB



Classic 350

Lanyard Cable
Viton Gasket

Orientation & Fixing of Classic Cap:

- Option 1: Apply thread adhesive onto both threaded parts (Flange Neck & Classic Cap)
 Orientate to the desired position and wait for the adhesive to set. **IMPORTANT!** Make sure all excess adhesive is cleaned off before it sets.
 We recommend using Tread seal (Loctite 577)
 [LOCTITE 577 - Thread Sealant - Henkel Adhesives \(henkel-adhesives.com\)](http://henkel-adhesives.com)
- Option 2: We can add a M4 Grub Screw at the back of the Classic Cap Hinge.
 Simply orientate to the desired position and screw until tightened.
 Extra charge will apply.

Fluid Containment – When It Matters

Tell: +4420 8594 7990 / Fax: +4420 8594 7989 / www.newton-equipment.com / info@newton-equipment.com
Registered in England. 6 Orwell Close/ Fairview Ind. Park/ Rainham/ Essex/ RM13 8UB